




Catharina Knieke (Autor)

## Fracture at the Nanoscale and the Limit of Grinding

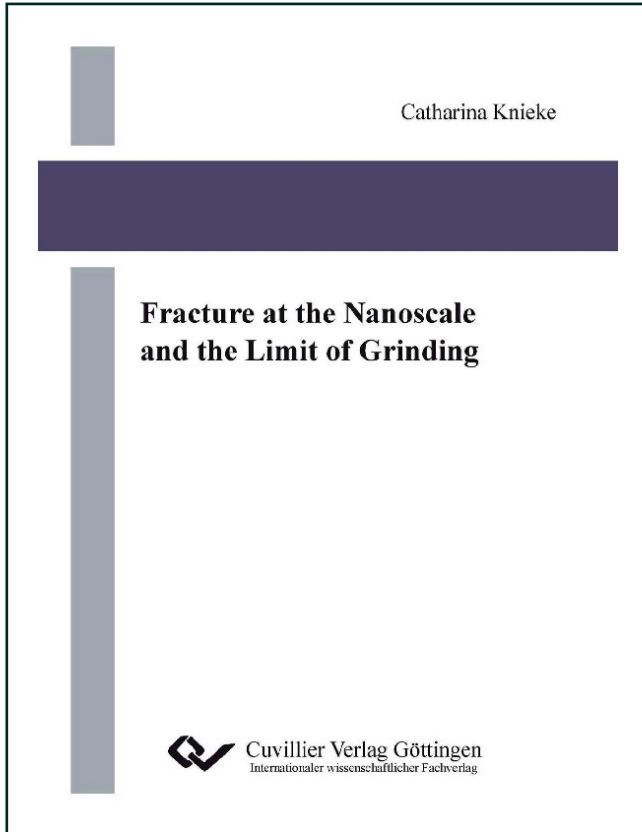

<https://cuvillier.de/de/shop/publications/37>

Copyright:

Cuvillier Verlag, Inhaberin Annette Jentzsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen, Germany

Telefon: +49 (0)551 54724-0, E-Mail: [info@cuvillier.de](mailto:info@cuvillier.de), Website: <https://cuvillier.de>



# Contents

<b>Nomenclature</b>	<b>9</b>
<b>1. Introduction</b>	<b>17</b>
<b>2. State of the Art</b>	<b>19</b>
2.1. Ultrafine grinding in stirred media mills . . . . .	19
2.2. The limit of grinding . . . . .	20
2.3. Graphene - properties and production methods . . . . .	26
<b>3. Theoretical Background</b>	<b>31</b>
3.1. Wet grinding with stirred media mills . . . . .	31
3.1.1. Fundamentals in stirred media milling . . . . .	31
3.1.2. The concept of stress energy and stress number . . . . .	32
3.1.3. Stabilization methods . . . . .	34
3.2. The particles' microstructure . . . . .	38
3.2.1. Defect structures in crystalline matter . . . . .	38
3.2.2. Size effects in nanocrystalline materials . . . . .	40
3.3. Particle breakage . . . . .	43
3.3.1. General considerations . . . . .	43
3.3.2. Breakage theories . . . . .	46
3.3.3. Fracture along the length scales . . . . .	48
<b>4. Experimental Section</b>	<b>51</b>
4.1. Experimental setup . . . . .	51
4.1.1. Comminution in LabStar LS1 . . . . .	51
4.1.2. Delamination in Batch Mill PE 075 . . . . .	53
4.1.3. Dry grinding in a planetary ball mill . . . . .	54



---

4.2. Materials and methods . . . . .	54
4.2.1. Materials . . . . .	54
4.2.2. Characterization methods and sample preparation . . . . .	56
<b>5. Breakage Behavior of Nanoparticles</b>	<b>61</b>
5.1. The apparent and true grinding limit . . . . .	61
5.2. The breakage behavior of tin dioxide . . . . .	64
5.2.1. Evolution of external structure . . . . .	64
5.2.2. Evolution of internal structure . . . . .	68
5.2.3. TEM studies of SnO <sub>2</sub> . . . . .	72
5.2.4. Breakage mechanism of tin dioxide . . . . .	77
5.3. Influence of feed material . . . . .	80
5.4. Influence of process conditions . . . . .	82
5.4.1. Influence of stress energy . . . . .	82
5.4.2. Breakage mechanisms at different SE . . . . .	86
5.4.3. Influence of grinding media shape . . . . .	89
5.4.4. Influence of suspension viscosity . . . . .	91
5.4.5. Influence of suspension stability . . . . .	94
5.4.6. Influence of process temperature . . . . .	95
5.4.7. Conclusion of process variations . . . . .	97
5.5. Breakage behavior of various inorganic materials . . . . .	98
5.5.1. Milling behavior of zirconia and alumina . . . . .	98
5.5.2. Comparison of different materials . . . . .	105
5.5.3. Grinding limit as a result of machine limitation . . . . .	108
5.5.4. Phase transition during grinding . . . . .	109
5.6. Scale-up of nanomilling . . . . .	111
5.7. The limit in dry grinding processes . . . . .	114
<b>6. Delamination of Graphite</b>	<b>121</b>
6.1. Breakage behavior of graphite . . . . .	122
6.1.1. Preliminary experiments . . . . .	122
6.1.2. Mechanism of delamination . . . . .	125
6.2. Characterization of delaminated sheets . . . . .	131
6.3. The role of stress energy . . . . .	139
6.4. Yield of delaminated sheets . . . . .	142



## Contents

---

6.5. First examples of application . . . . .	145
6.5.1. Production of filled polymers . . . . .	145
6.5.2. Preparation of conductive films . . . . .	148
6.5.3. Coating of delaminated sheets with platinum nanoparticles . . . . .	152
<b>7. Conclusion and Outlook</b>	<b>157</b>
<b>Bibliography</b>	<b>160</b>
<b>A. Appendix</b>	<b>173</b>
A.1. Reproducibility of grinding experiments . . . . .	173
A.2. Comparison between Rietveld and Scherrer evaluation . . . . .	176
A.3. Micropore analysis of various materials . . . . .	179
A.4. Coating of delaminated graphite sheets . . . . .	182